

Instruction manual

HPS40-1 2+2 female connector without CPA MCC/SCC

2,5mm²; 3,0mm²; 4,0mm²; 5,0mm²; 6,0mm²




Release August 2022

INSTRUCTION MANUAL - PLUGGING

1st step:

Collar the connector [1] to the mating side [2] and insert the connector.

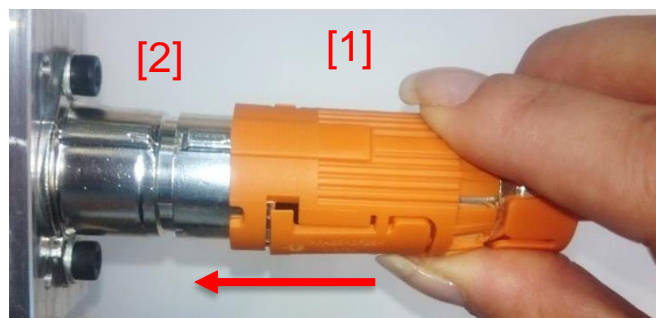

TIPP:



Consider the correct Orientation.

2nd step:

Insert the connector with force until block.



TIPP:




If the connector is not at the final position –
the locking hook stays outside.

INSTRUCTION MANUAL – DISCONNECT

1st step:

First pressing both locking hooks together and then pull the connector.

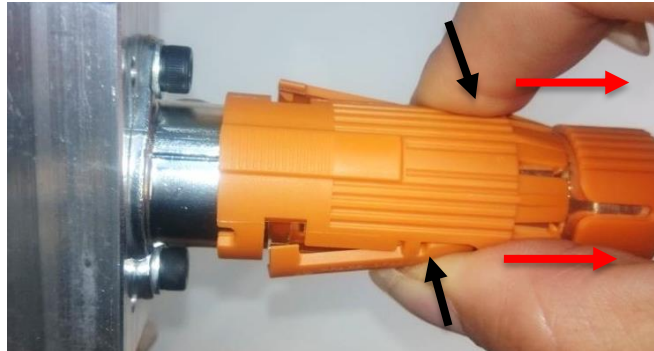

TIPP:



Pressing area of lockinghook on both sides. If it is easier, it is allowed to support by pulling at the cable.