

## Instruction manual

# HPS40-2 2+2 female connector NAFTA MCC/SCC

2,5mm<sup>2</sup>; 4,0mm<sup>2</sup>; 6,0mm<sup>2</sup>




Release August 2022


## INSTRUCTION MANUAL – PLUG-IN

### 1<sup>st</sup> step:

Move the connector [1] to the mating side [2] and fit the connector.

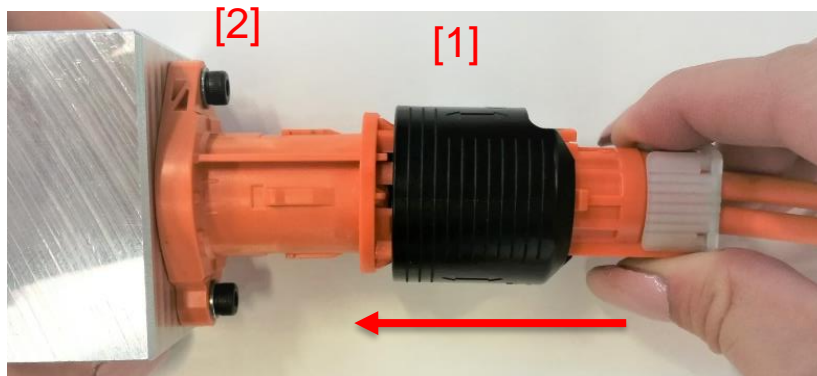


### TIPP:

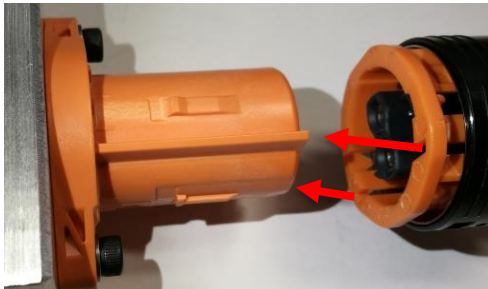

Consider the correct orientation.

## 2<sup>nd</sup> step:

Move the connector with force until block.

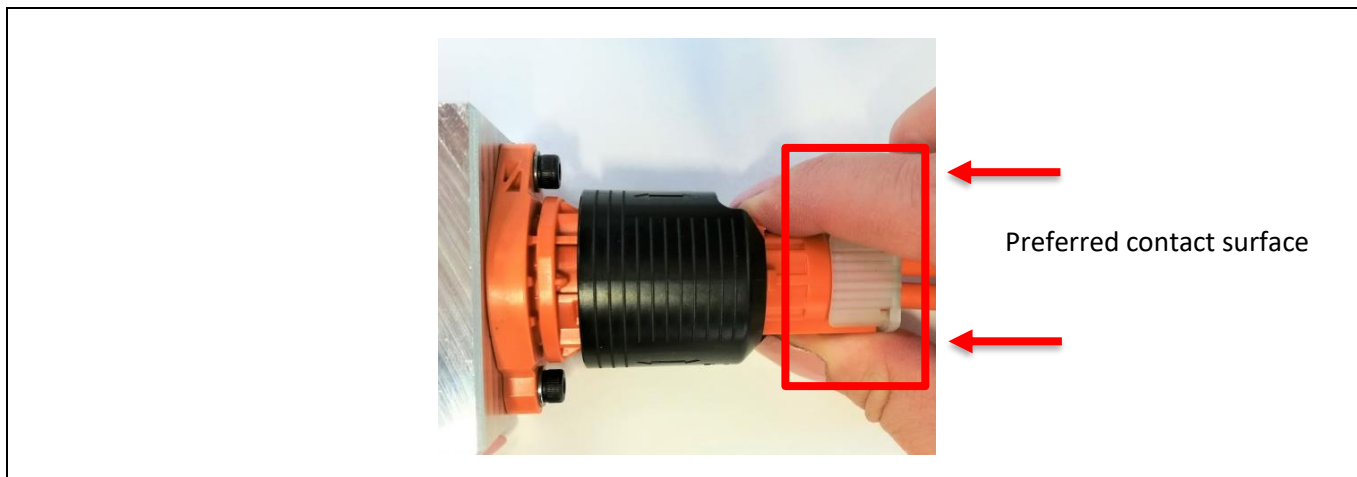


### TIPP:



If the connector is not in the final position –  
the locking hook stays outside –  
a movement of the CPA (black part) is not possible.

**3<sup>rd</sup> step:**

Move the CPA (black part) to the front block.

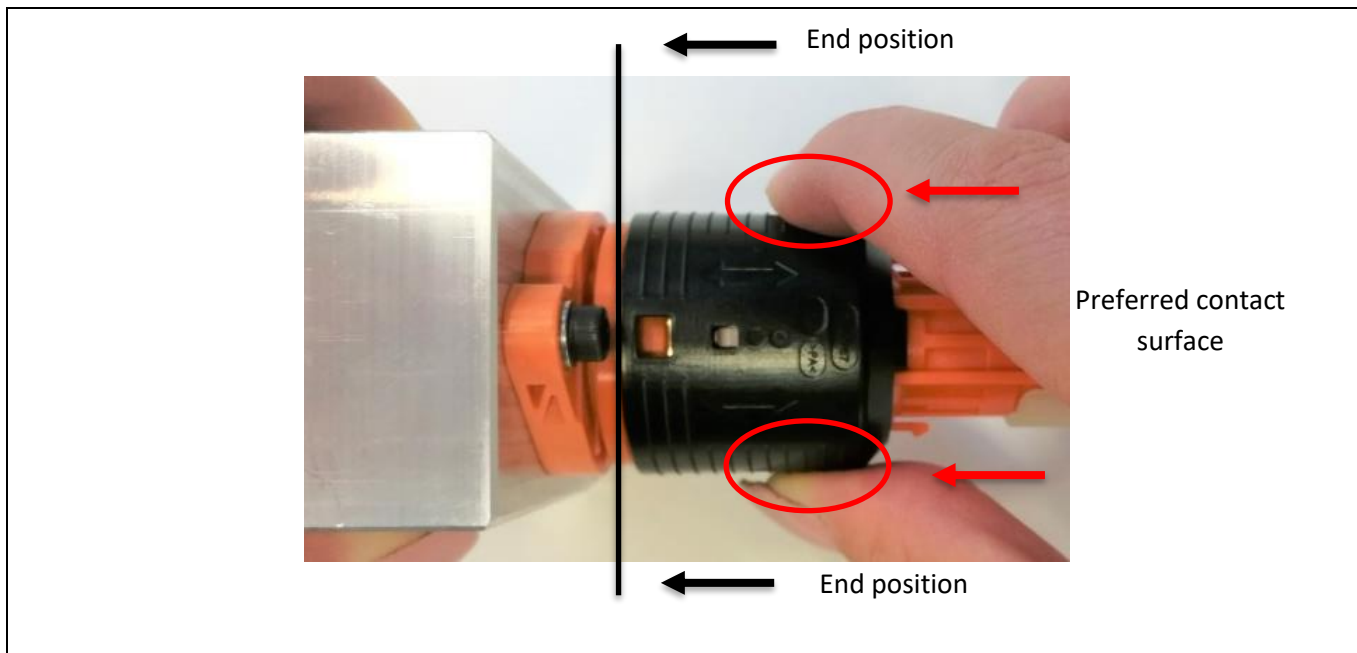

**TIPP:**




The CPA (black part) is locked if "locked" is visible.

## INSTRUCTION MANUAL – DISCONNECT

### 1<sup>st</sup> step:

Pull CPA (black part) back until the blocking position.

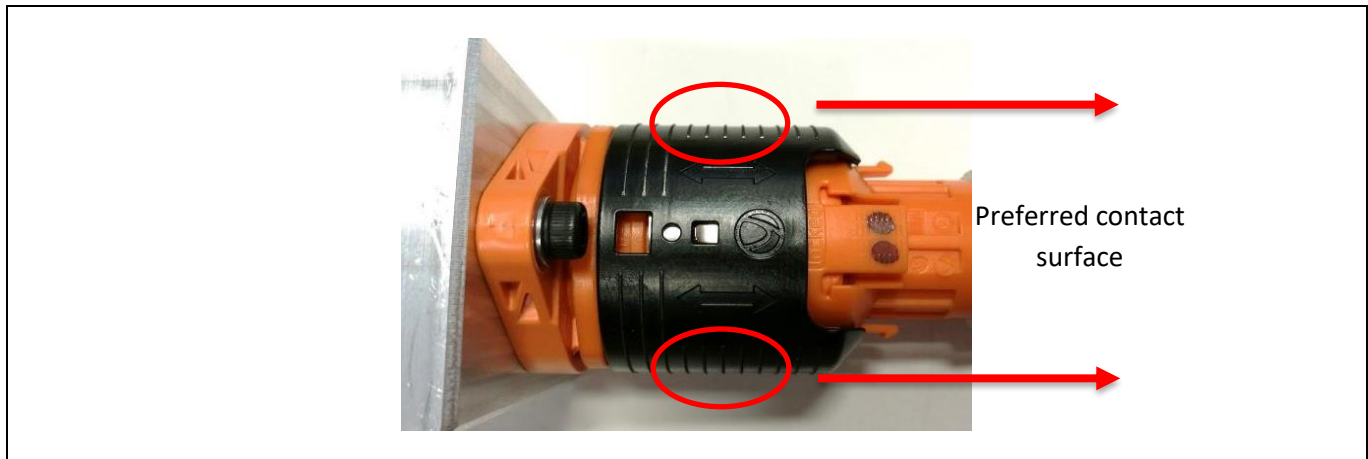


### TIPP:



Pulling back by holding at the marked area on both sides simultaneously.

## 2<sup>nd</sup> step:

First press the locking hook, hold it, and then pull the connector back.

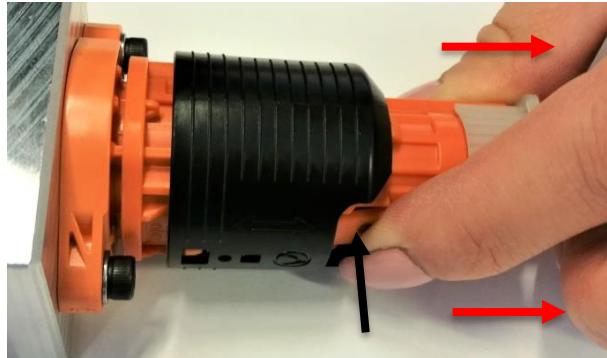

### TIPP:



Pressing area of the locking hook