



HPS40-2 PLUS In-Line Connector
HPS40-2 PLUS IN-LINE CONNECTOR

Leitung : siehe Tabelle
WIRE: SEE TABLE

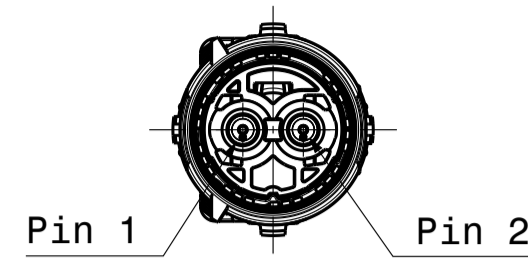


2	BLACK
1	RED
PIN	COLOUR

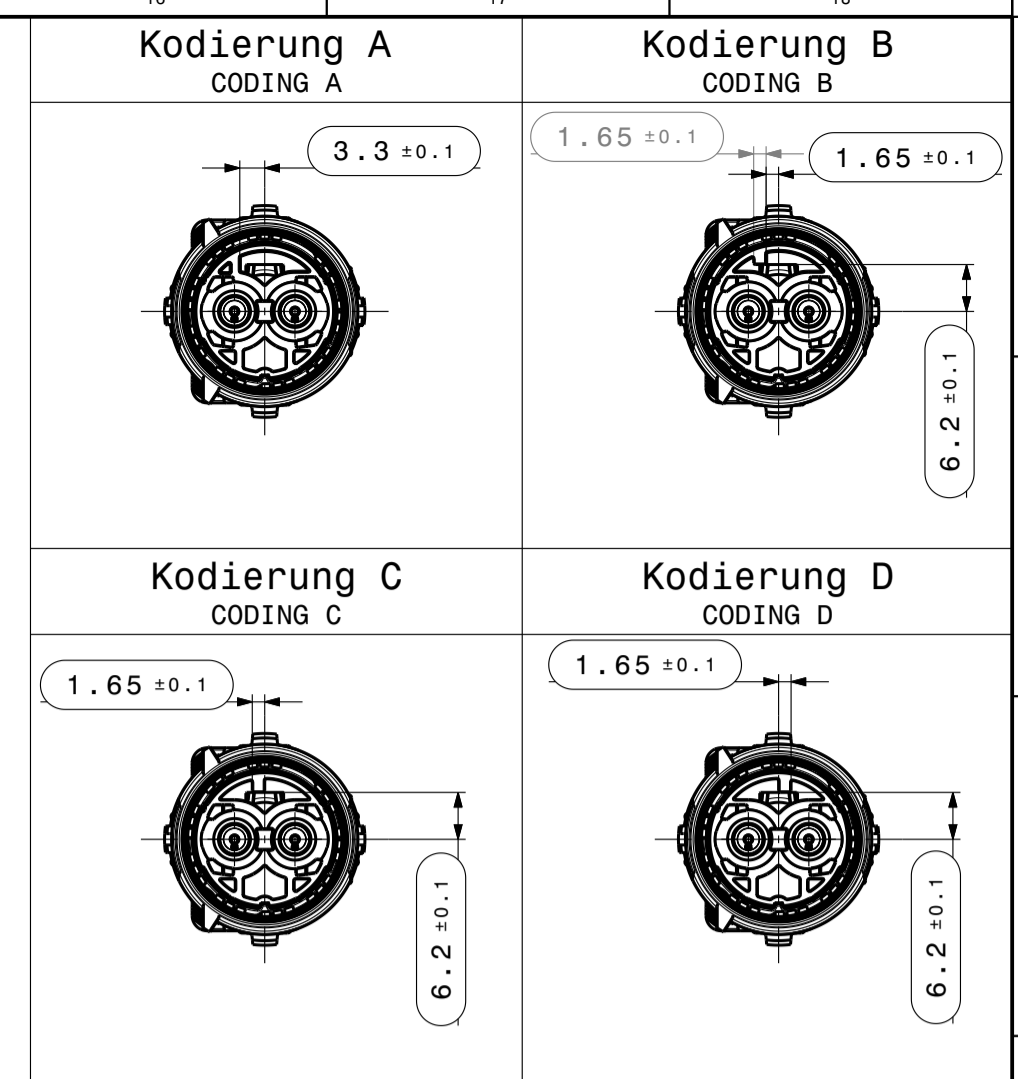

100% elektrische Pruefung
100% ELECTRIC TEST
100% Durchgangspruefung
100% CONTINUITY TEST
Spannungsfestigkeit 3000Vac zwischen Hochstromkontakten und Hochstromkontakte zum Gehaeuse.
DIELECTRIC STRENGTH 3000vac BETWEEN HIGH VOLTAGE TERMINALS, HIGH VOLTAGE TERMINAL AND METAL HOUSING.
Kodierungsabfrage
QUERY CODING

Bemerkungen:
COMMENTS:
-Massgebend ist der deutsche Text
GERMAN TEXT IS VALID
-Kodierung A gezeichnet
CODING A IS DRAWN
-Verpackung: einzeln verpackt in Luftpolsterbeutel
PACKAGING: SINGLE PACKED IN AIR BUBBLE BAG
-Fertigung nach Verarbeitungsspezifikation EVS-100139
MANUFACTURING ACC. TO PROZESS SPECIFICATION EVS-100139

Laengentoleranzen der Leitungen:
TOLERANCE OF WIRE LENGTH:
0mm - 999mm ±10
1000mm - 4999mm ±20
5000mm - * ±50
*mit Hirschmann Automotive abzustimmen
*HAS TO BE CLARIFIED WITH HIRSCHMANN AUTOMOTIVE

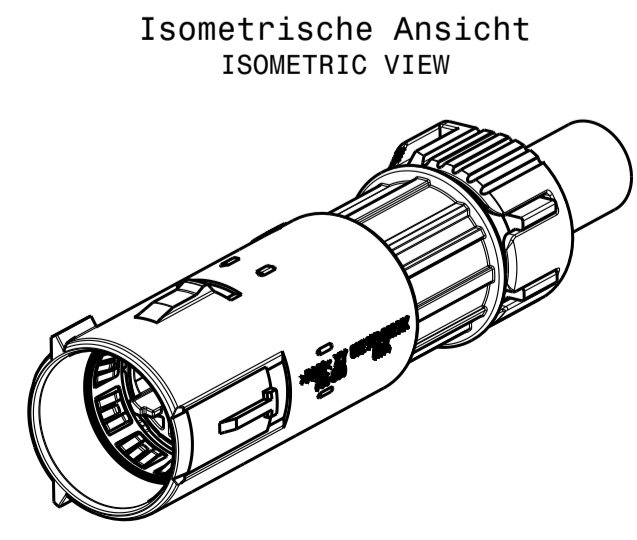

Isometrische Ansicht
ISOMETRIC VIEW

HA PART NUMBER	SUBASSEMBLY	CODING	L [mm]	CROSS-SECTION	MANUFACTURER	HA PART NUMBER	SUBASSEMBLY	CODING	L [mm]	CROSS-SECTION	MANUFACTURER
908-310-D91	812-132-D91	A	10000±50	6mm ²	Coroflex (Coroplast)	908-310-E24	812-132-E24	D	5000±50	4mm ²	Coroflex (Coroplast)
908-310-D84	812-132-D84	D	908-310-E23			812-132-E23	C				
908-310-D83	812-132-D83	C	908-310-E22			812-132-E22	B				
908-310-D82	812-132-D82	B	908-310-E21			812-132-E21	A				
908-310-D81	812-132-D81	A	908-310-E11			812-132-E11	A				
908-310-D51	812-132-D51	A	3000±20	6mm ²	Coroflex (Coroplast)	908-310-E24	812-132-E24	D	5000±50	4mm ²	Coroflex (Coroplast)
908-310-D41	812-132-D41	A				908-310-E23	812-132-E23	C			
908-310-D31	812-132-D31	A				908-310-E22	812-132-E22	B			
					Cablana (Condumex)	908-310-E21	812-132-E21	A			
						908-310-E11	812-132-E11	A	3000±20		

01	02	DELETED NOT NEEDED INDICES AND ALL THE SERIAL INDICES; Ersterstellung / Initial edition	23.11.2023 11.01.2023	SOE CSC
HIRSCHMANN AUTOMOTIVE		DRAWING NO. / ZEICHNUNGSNUMMER 908-310-...00		SHEET / BLATT 1/1

This material contains information protected by copyright. Any reproduction or translation into another language without the prior written consent of Hirschmann Automotive is prohibited.

Plot from: T:\MATER on 10.02.2024 Doc.Vers. 01 Valid from: 20231123 Valid until: ... Status: Kundenfrage